

ALUMINUM ELECTROLYTIC CAPACITORS


- High stability
- Compact and light weight

SPECIFICATIONS

| Item | Characteristics | |
|-----------------------------------|--|----------|
| Operating Temperature Range(°C) | -20~+55 | |
| Rated Voltage | 330WV.DC | 360WV.DC |
| Voltage Proof | 350SV.DC | 390SV.DC |
| Capacitance Tolerance(20°C,120Hz) | -10%~+20% | |
| Dissipation Factor(20°C,120Hz) | Capacitance:150~600uF less than 0.1 700~1500uF less than 0.15 | |
| Leakage Current | I=1xC(20°C,5minutes)MAX I:Leakage Current(uA) C:Nominal Capacitance(uF) | |

DIMENSIONS

mm

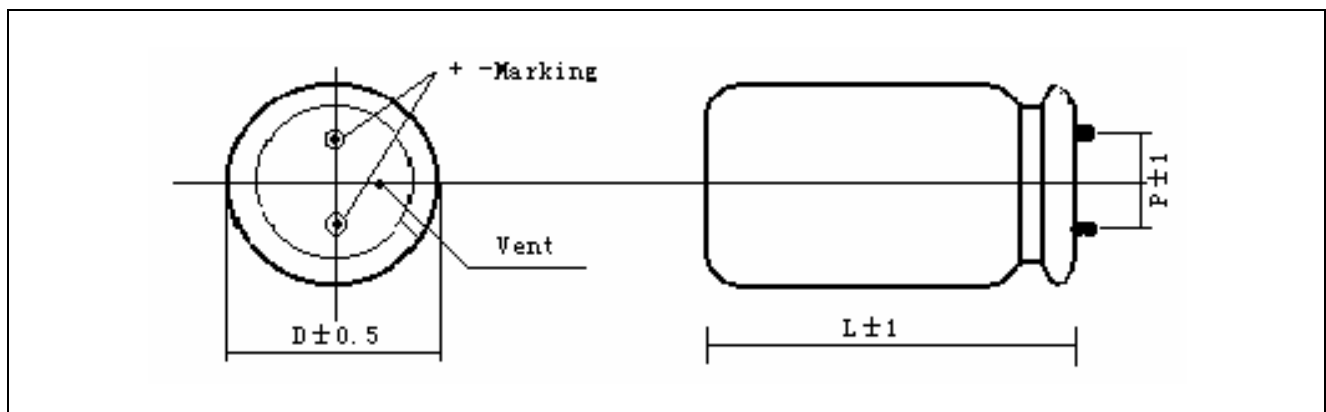

STANDARD RATINGS 330WV.DC (350SV.DC)

| Capacitance | D(mm) | 20.0 | 22.0 | 25.0 | 30.0 | 35.0 |
|-------------|-------|------|------|------|------|------|
| Uf | P | 8.0 | 10.0 | 10.0 | 10.0 | 10.0 |
| 150 | L(mm) | 25 | | | | |
| 180 | | 30 | 25 | | | |
| 200 | | 35 | 30 | 25 | | |
| 250 | | 40 | 30 | 30 | | |
| 300 | | 45 | 35 | 30 | 25 | |
| 350 | | 50 | 40 | 35 | 25 | |
| 400 | | | 40 | 40 | 30 | 25 |
| 450 | | | 45 | 40 | 30 | 25 |
| 500 | | | 50 | 45 | 35 | 25 |
| 600 | | | | 50 | 35 | 30 |
| 700 | | | | 55 | 40 | 30 |
| 800 | | | | | 45 | 35 |
| 900 | | | | | 45 | 35 |
| 1000 | | | | | 50 | 40 |
| 1200 | | | | | 60 | 45 |
| 1300 | | | | | | 45 |
| 1500 | | | | | 50 | |

ALUMINUM ELECTROLYTIC CAPACITORS

360WV.DC (390SV.DC)

| Capacitance | D(mm) | 20.0 | 22.0 | 25.0 | 30.0 | 35.0 |
|-------------|-------|------|------|------|------|------|
| Uf | P | 8.0 | 10.0 | 10.0 | 10.0 | 10.0 |
| 150 | L(mm) | 30 | 25 | | | |
| 180 | | 35 | 30 | 25 | | |
| 200 | | 35 | 30 | 30 | | |
| 250 | | 40 | 35 | 30 | 25 | |
| 300 | | 50 | 35 | 35 | 30 | |
| 350 | | | 40 | 40 | 30 | 25 |
| 400 | | | 45 | 40 | 35 | 25 |
| 450 | | | 50 | 45 | 35 | 30 |
| 500 | | | | 50 | 40 | 30 |
| 600 | | | | 60 | 40 | 35 |
| 700 | | | | | 45 | 35 |
| 800 | | | | | 50 | 40 |
| 900 | | | | | 60 | 40 |
| 1000 | | | | | 60 | 45 |
| 1200 | | | | | | 50 |
| 1300 | | | | | | 55 |
| 1500 | | | | | 60 | |

Also available in snap-in and screw terminal configurations.